

## MS-228-6



## MS-228-6

Power Reed Sensor M8 thread

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	50
Switching voltage max.	VDC	200
	VAC	250
Switching current max.	A	1.5
Carry current max.	A	2
Breakdown voltage min.	VDC	400
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 <sup>10</sup>

Features
➤ Adjustable switching point
➤ Replaces various competitors types
➤ Various sensitivity ranges available
➤ Customized types available


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	25 - 40
Drop out min.	AT	5
Test coil	TC	020
Test equipment tolerance	± AT	2

Approvals

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	300
Resonant frequency typ.	Hz	2600
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

Environmental Characteristics	
Operating temperature	°C -20 to +85
Vibration (50-2000 Hz)	g 20
Shock (1/2 sin 11 ms)	g 50

### Dimensions in mm

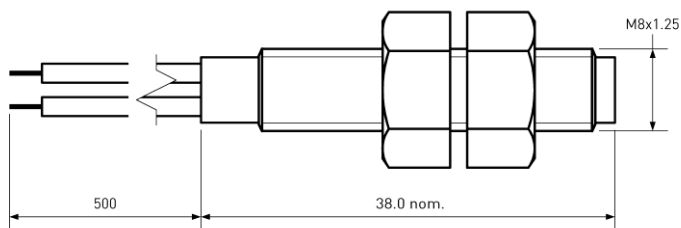

Ordering Information	
Packing Unit	50 pcs
Weight per piece	6 g
Weight per package	310 g
Standard AT Ranges	
	4 = 25 to 30 AT
	5 = 30 to 35 AT
	6 = 35 to 40 AT

Ordering Example  
MS-228-6-4 describes MS-228-6 with 25 to 30 AT.

MS-228-6




**MS-228-6**

Power Reed Sensor M8 thread

Material Information

	Material	Colour
Housing	PA6, 30%GF, with M8 thread	black
Cable	UL 1007/1569, AWG 24, 4 mm stripped and tinned	black
Nuts	PA6, M8, 2 pcs separately packed	black
Potting compound	Epoxy	black

Test Procedure of final Reed Sensor

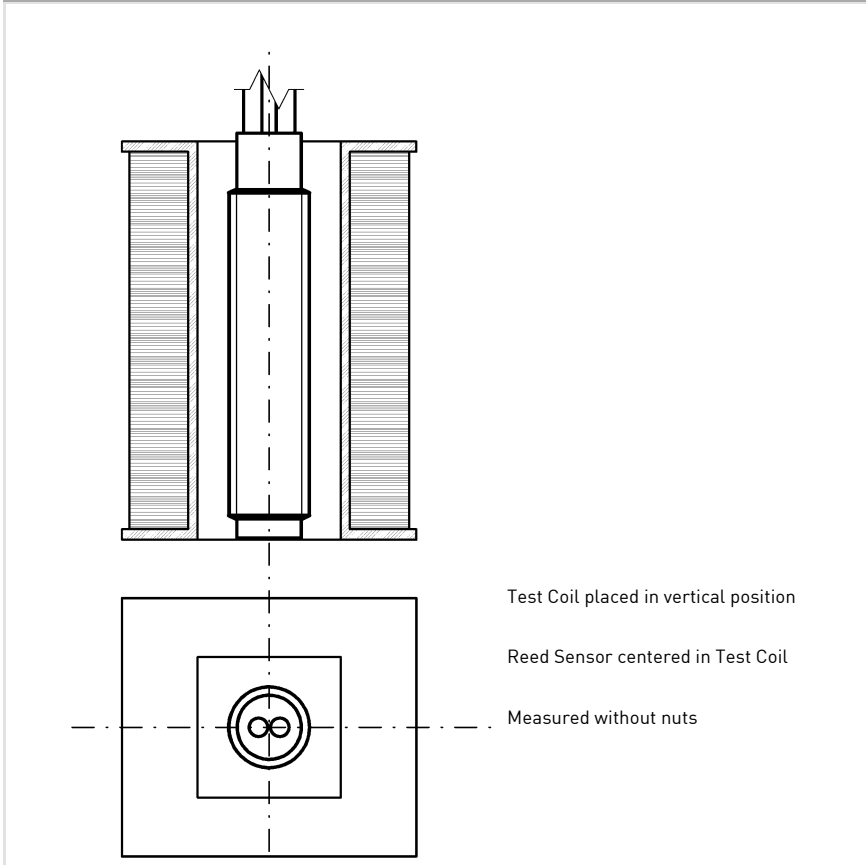

Test Parameters

Test coil	TC-324
Test programs	
AT range	Test program
4 =	MS-228-6-4
5 =	MS-228-6-5
6 =	MS-228-6-6

Remarks

When mounted onto ferromagnetic parts switching distance of MS-228-6 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Matching actuator MSM-228 available as well.